

PRODUCT CATALOGUE.



INCLUDES SPINDLES & GEARBOXES

EXPERIENCED SERVICE & SUPPORT NETWORK

* T & Cs APPLY



POWERS PERFORMANCE.

From humble beginnings in New Zealand, to a world leader in Commercial Mowing - our success is driven by a passion to help customers find a better way.

We listen to how you use our products, designing with customer focused innovation to solve problems you encounter. The result? Mowing solutions which increase productivity, reduce maintenance and can be relied on day-afterday, for years of full time commercial use.



LONG
COMMERCIAL LIFE.



LOW TOTAL-COST-OF-OWNERSHIP.



EASE OF MAINTENANCE.



INTUITIVE TO USE.



INDUSTRY LEADING
CUT PRESENTATION.



SERVICE THAT EXCEEDS EXPECTATIONS.







STRIKER FOR HULL KINGSTON ROVERS.



THE CUSTOMER.

Hull Kingston Rovers are a professional rugby league club in the Super League.

They have won five league championships and one Challenge Cup.

Anthony Brockwell is the Head Groundsman for Hull Kingston Rovers at Craven Park.



Hull Kingston Rovers needed:

- The ability to consistently deliver a high-performance cut and finish on premium turf
- Low cost of ownership to allow budget to be used in other pitch maintenance projects



Trimax delivers:

- Reliable mowers with low maintenance requirements and industry-leading uptime
- Low cost of ownership
- Superior cut and finish on fine turf



Here's what Anthony says about Trimax:

"After booking a demonstration, Trimax came onsite and talked us through the Striker rotary mower. They left the machine with us, so we were able to get hold of the unit and really test it. Over the weekend of having it, it was a no brainer to use Trimax. It was a fantastic machine for what we needed it to do! We can now put that extra £1,200 that we would have spent on cylinder maintenance back into the pitch."

SNAKE FOR COTTINGHAM PARK GOLF & LEISURE CLUB.



THE CUSTOMER.Cottingham Park Golf & Leisure Club is situated in Yorkshire, U.K.

Established in 1994, it started out as an 18-hole golf course, but soon expanded to include holiday lodges, restaurant facilities, a health club, a gym, an equestrian section and a driving range. The 2008 acquisition of the neighbouring Skidby Lakes golf course made Cottingham Park a 36-hole facility.

John Wiles is the Course Manager and a Cottingham Park Company Director.



Cottingham Park Golf and Leisure Club needed:

- > The ability to mow over difficult terrain without scalping
- A versatile and reliable machine with minimal downtime
- Excellent aftersales support and service



Trimax delivers:

- Full-width rollers to produce an excellent striping effect and protect against scalping
- Independently articulating cutting decks to easily mow over contours
- An industry-leading 3-year warranty and local parts and service support



Here's what John says about Trimax:

"This is a very simple design, very well built. It just keeps out there cutting arass"

"In winter and autumn, when we stop using the cylinder mowers on the fairways we use the Snake to reduce the height of cut down to 20mm and we can still prepare and present the fairways, stripe and roll them over and top them down to a manageable level."





PROCUT FOR MOUNT KELLY.



THE CUSTOMER.

Mount Kelly in Tavistock, UK is a private, independent co-educational boarding school.

It sits on 140 acres of tendered and manicured school grounds and sports fields. Matt Stevens is the Head of Grounds Staff at Mount Kelly, and Bobby Skelton is the Sports Director.



Mount Kelly needed:

- > To maintain the appearance and health of grass on the pitches and fields to provide excellent quality playing surfaces
- > Equipment with low maintenance requirements to save time and labour
- Machinery that is easy and intuitive to operate while still achieving premium results



Trimax delivers:

- Low cost of ownership
- > Full-width rollers capable of producing striping while minimising ground disruption
- > Simple cut height adjustment that can be done while in the field
- Design considerations for easy cleaning and maintenance access



Here's what Matt says about Trimax:

"The efficiency of the mower is excellent! Being wider than others I can cover more ground, saving time and fuel. Also the turn around time has been cut from previous attachments as the Procut is so easy to take on and off the tractor."

"It has improved the look of our pitches by a great amount. This is what I am most impressed by as it is the most important factor. The quality of cut that the Procut gives is outstanding. I haven't ever seen a mower that you can cut slighty longer grass than normal even in the rain and it doesn't drop a single bit of grass clippings and gives an excellent finish to the surface."

Here's what Bobby says about Trimax:

"The new mower has made a huge impact on keeping our large playing fields in excellent condition , a particular challenge at this time of year when lots of Cricket is being played and the grass is growing at its fastest. The new mower has allowed us to meet this challenge and our pitches look spectacular."

FLAILDEK FOR MARK **ELEY GROUND** MAINTENANCE.



THE CUSTOMER.

Mark Eley has been the owner and operator of Mark Eley Ground Maintenance since 2002.

Based in Neath, South Wales, he works across southern Wales and neighbouring areas of the UK.



NEED.

Mark Eley Grounds Maintenance needed:

- Maximum reliability and minimal downtime in full-time commercial operations
- > The versatility to cut fine turf in village commons and long grass in verges and parks
- Low cost of ownership and a quick return on investment



THE VALUE.

Trimax delivers:

- Easy service and maintenance
- Inexpensive spare parts that are readily and locally available
- Maximum versatility with Trimax's unique converter to deliver an excellent finish on both long and short grass
- Able to fit on a compact tractor to fit in tight spaces



THE RESULT.

Here's what Mark says about Trimax:

"They've never met their match. Whatever I put them into they handle. I'm always impressed with how good they are. These mowers never clog, even when cutting long grass in wet weather. They always leave a superb finish."

"They are bombproof and will handle anything. They're well made, easy to operate and easy to service. There's nothing to match the Trimax machines. As I like to say 'The colour is red. The future is Trimax!'''



















SNAKE/S2



PEGASUS/S5



AILDEK/FX



EZEEMOW/FX







ROTARY MOWERS.



TRIMAX STRIKER

Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass 10 to 100mm. With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a cylinder mower and is ideal for educational and sports facilities where presentation is key!







SPECIFICATIONS	150	190
Cutting Width	1.46m (4' 9½")	1.94m (6' 4½")
Overall Width	1.56m (5' 1½")	2.04m (6' 8½")
Overall Length	1.16m (3' 9½")	1.16m (3' 9½")
Height	0.83m (2' 8½")	0.83m (2' 8½")
Cut Height Range	10 - 100mm (3/11 - 4")	10 - 100mm (¾" - 4")
No. of Blade Spindles	3	4
Approx. Weight	322kg (710lbs)	400kg (882lbs)
Min PTO Output	25hp	30hp
VIII		

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We can now mow with confidence when the grass is wet, knowing it won't clog the machine up. As well as doing a great job, the machine is also a sound investment.

CHRIS PARRY | Loughborough Endowed Grammer School, UK

KEY APPLICATIONS.

- ✓ Sports fields & pitches
 ✓ Golf Courses
 ✓ Country Clubs
- ✓ Estates & Lifestyle Blocks ✓ Schools

WHAT'S NEW ON STRIKER

The Striker was originally designed as a compact solution for sports turf, especially for grounds maintenance for local football and cricket clubs. It features a simpler pan construction than the ProCut and includes maintenance-free ball bearing spindles.





PRODUCT FEATURES.



LOW COST OF OWNERSHIP With only 4 grease points on the mower and with robust sealed spindles, the Trimax Striker has incredibly low maintenance requirements.



SAFETY FOR PUBLIC PLACES Striker exceeds international safety standards, and can be used with confidence in public spaces, school sports fields and confined areas.



LAZERBLADEZ™ Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



ADVANCED ENGINEERING Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cutting in the market.



STRIPING CAPABLE Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.




Able to be paired with tractors as low as 25hp, the Striker is perfect for smaller budgets and compact tractors.

*OPTIONAL FEATURES.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions. **✓** SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.







TRIMAX PROCUT/S5

A highly versatile roller mower, the PROCUT SERIES 5 is a multi-spindled roller mower designed to give a high cut quality and a great spread of clippings.

The ProCut has been a successful part of the Trimax range for over 30 years. Mowing parks, reserves, school grounds, sports fields and golf courses around the world - From the grounds of Windsor Castle to your local community sports fields.

The ProCut Series 5, released in 2023 is excellence refined. The Procut S5 builds on the market leading cut and spread quality of the previous series whilst removing all daily maintenance requirements making it the perfect solution for a variety of commercial environments.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 IN YOUR ENVIRONMENT.







SPECIFICATIONS	178	210	237	290
Cutting Width	1.74m (5' 8 ½")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
Overall Width	1.89m (6' 2 ½")	2.21m (7' 3")	2.47m (8'1")	3.04m (10')
Overall Length	1.44m (4' 9")	1.51m (4' 11 ½")	1.44m (4' 9")	1.44m (4' 9")
Height	1.08m (3' 6 ½")	1.08m (3' 6 ½")	1.08m (3' 6 ½")	1.08m (3' 6 ½")
Cut Height Range	10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ")	10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ")	10 - 110mm (¾" - 4 ¼")	10 - 110mm (¾" - 4 ¼")
No. of Blade Spindles	3	3	4	5
Approx. Weight	492kg (1085lbs)	543kg (1197lbs)	605kg (1334lbs)	707kg (1559lbs)
Min PTO Output	35hp	40hp	45hp	55hp

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We couldn't be happier with our 19 year old ProCut! Since purchasing the mower we haven't had any problems or downtime - it just seems to keep going and going. The presentation is great and we often receive comments on how good the grass looks. KEN BURNINGHAM | Woodside Golf Club, UK

KEY APPLICATIONS.

- ✓ Municipalities
 ✓ Sport Fields
 ✓ Turf
 ✓ Education
 ✓ Golf
- ✓ Estates & Lifestyle Blocks

WHAT'S NEW ON PROCUT/S5

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, stronger cut.

PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



AUTOMATIC BELT TENSIONING Removes the need for belt adjustments and improves drive to the spindles and blades.



Available in uplift and flat formation to suit mowing requirements, the hang back in tough conditions.



LOW MAINTENANCE

Zero daily maintenance. Spindles, roller bearings and auto-belt unique tilt forward design minimises tensioning are maintenance-free.



STEADFAST SEALED SPINDLES We've eliminated the tedious

task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from helt chamber.



ACCURATE SPINDLE SETTING TECHNOLOGY

Spindle height is perfectly aligned providing the most accurate cut possible.



PRECISE HEIGHT ADJUSTMENT

Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for



STAND ON COVERS

cleaning and servicing.



✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ LIGHTING KIT WITH

STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and tools. **✓ FRONT MOUNT**

Convenient visibility. Only for tractors with front PTO drive.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.



TRIMAX PROCUT/S5 FM

The front mounted version of the ever-popular rear linkage Trimax PROCUT.

The Trimax ProCut FM is a robust machine engineered to withstand everyday use in the toughest commercial environments yet will deliver a clean cut - every time. In operation, the front-mounted ProCut Series 5 rides on the ground on its front wheels and rear roller. The front castor wheels and rear roller follow ground contours allowing easy manoeuvrability and prevent scalping. With out-front mowing the need for the operator to look behind is reduced and the tractor wheels do not flatten the uncut grass.

SPECIFICATIONS 178 210 237 290 **Cutting Width** 1.74m (5' 8 ½") 2.06m (6' 9") 2.32m (7'7") 2.89m (9' 6") 1.91m (6' 3") **Overall Width** 2.22m (7' 3 ½") 2.48m (8'11/2") 3.05m (10' 1/2") **Overall Length** 1.65m (5' 5") 1.65m (5' 5") 1.65m (5' 1/2") 1.72m (5' 8") 1.08m (3' 6 ½") 1.08m (3' 6 ½") 1.08m (3' 6 ½") 1.08m (3' 6 1/2") Height 10 - 110mm **Cut Height** 10 - 110mm 10 - 110mm 10 - 110mm (3/3" - 4 1/3") (3/1" - 4 1/1") $(\frac{3}{8}" - 4\frac{1}{3}")$ $(\frac{3}{8}" - 4\frac{1}{3}")$ Range No. of Blade Spindles **Approx. Weight** 569kg (1254lbs) 616kg (1358lbs) 675kg (1488lbs) 770kg (1697lbs) Min PTO Output 35hp 45hp 40hp

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

KEY APPLICATIONS.

✓ Municipalities
✓ Horticulture Aviation ✓ Racecourses

WHAT'S NEW ON PROCUT/S5 FM

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, stronger cut.

✓ Education
✓ Sports Fields

PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



AUTOMATIC BELT TENSIONING Removes the need for belt adjustments and improves drive to the spindles and blades.



LAZERBLADEZ™ Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



LOW MAINTENANCE

Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



STEADFAST SEALED SPINDLES

teadFAST 6

We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.

FULL WIDTH ROLLER

and aids in striping.

Full width roller minimises

scalping in undulating conditions





PRECISE HEIGHT ADJUSTMENT

Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



ACCURATE SPINDLE SETTING TECHNOLOGY

Spindle height is perfectly aligned providing the most accurate cut possible.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



✓ REAR MOUNT

Available in rear three-point linkage configuration with front and rear rollers for unmatched safety.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ OUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 **FM** IN YOUR ENVIRONMENT.





TRIMAX STEALTH/S3

The STEALTH SERIES 3 has been designed to give a higher quality of cut, operate in a wider range of conditions, be safer, more robust, easier to operate and take less time to maintain than any previous STEALTH.

Backed by 30 years' of experience in market, the concept of Stealth Series 3 was born from the demand of our Australian customers for a mower that was more versatile in terms of long grass performance and more user friendly for both the operator and the workshop.

Backed by our industry leading 3-year warranty and our parts and technical support team, we know the Stealth Series 3 to be the best linkage wing mower for passive and active turf in the market.

SPECIFICATIONS	340
Cutting Width	3.4m (11' 2")
Overall Width	3.55m (11' 8")
Transport Width	2.42m (7' 11")
Overall Length	1.63m (5' 4")
Height (wings up)	1.21m (3' 11½")
Cut Height Range	10 - 90mm (¾" - 3½")
No. of Blade Spindles	5
Approx. Weight	940kg (2070lbs)
Min PTO Output	70hn

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We're mowing 7 hours a day and getting large areas done quickly. It's easily manoeuvrable and the contouring following ability of the wings and the ability to fold them up with an in-cab transport lock is a huge advantage. JOHN ROSNELL | Springbrook Wholesale Nursery, Gold Coast QLD

KEY APPLICATIONS.

- ✓ Municipalities ✓ Parks & Reserves ✓ Estates & Lifestyle Blocks ✓ Racecourses ✓ Sports Fields
- → Horticulture
 → Aviation

WHAT'S NEW ON STEALTH/S3

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenancefree spindles and composite maintenance-free bushes. Stealth wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for improved cut quality and easy cleaning.

PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal



GREATER MOWING VERSATILITY

The improved cutting chamber and baffle design directs airflow from the blades out and over the rear roller for a better cut and spread.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from belt cavity.



LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



ANTI-WEAR SKIDS

Anti-wear skids reduce wear on side channels when operating in rough or uneven terrain.



LAZERBLADEZ"

Available in up-lift and flat formation in wet conditions. to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height Breaker bar, 24mm socket and indicators allow the easy adjustment extension bar for cut height of cut heights without having to raise or lower the wings and deck.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.

*OPTIONAL FEATURES.

✓ ELECTRIC UNLOCK

Upgrade to electric actuation for the mower wings' transport lock.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

✓ SERVICE STANDS

Lockable stands for safe underside access.

✓ STORAGE BOX

Easy access to spare parts and tools.

✓ TOOLBAG

adjustments.





TRIMAX SNAKE/S2

The Trimax SNAKE is used on some of the most prestigious golf courses around the world. The cutting system has been studied by the Sports Turf Institute of New Zealand and declared to produce a cut of equal quality to cylinder mowers however with the versatility and reliability of our famous rotary design.

An accumulation of over 40 years of Trimax innovation, engineering and customer insight, the Snake has been designed specifically for sports turf and golf courses. We've seamlessly combined our world class cut quality and articulation capabilities and believe we've created the best sports turf rotary mower in the world. Built for agility, incredibly robust and extremely low maintenance the Trimax Snake won't fail to impress.

SPECIFICATIONS 400 **Cutting Width** 3.23m (10'7") 3.99m (13'1") **Overall Width** 3.37m (11'1") 4.11m (13' 6") **Overall Length** 3.5m (11' 6") 3.5m (11' 6") **Transport Width** 2.1m (6' 101/2") 2.14m (7' 1/4") 1.82m (5' 111/2") 2.21m (7' 31/2") **Transport Height** 10 - 100mm (³/₈" - 4") 10 - 100mm (³/₈" - 4") **Cut Height Range** No. of Blade Spindles 9 11 Approx. Weight 1250kg (2756lbs) 1390kg (3064lbs) Min PTO Output 40hp 35hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



Buying the Snake was the best decision I have ever made! Its one hell of a machine and how it cuts both long and short grass the same is unbelievable. **BRIAN KEIGHERY** | B.A.K. Services, UK

KEY APPLICATIONS.

- ✓ Golf Courses (Roughs & Fairways)
 ✓ Sports Fields
 ✓ Turf/Sod Farms
 ✓ Municipalities
- ✓ Schools ✓ Large Estates & Country Clubs

WHAT'S NEW ON SNAKE S2

The Snake Series 2 includes the new Trimax LocTEK stubless roller bearing retention system. The roller thickness has been increased to 5mm. The Snake now features replaceable axle stubs, a 90-degree rotatable jack stand, and maintenance-free pivot bushes.

PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention. alignment, bearing life and minimal



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aides in striping.



ZERO TURN

Allows continuous cutting while turning sharply for maximum productivity.



AUTOMATIC BELT TENSIONERS

Automatic belt tensioners eliminate the need for belt adjustments and improves drive to the spindles and blades.



QUIKLIFT

QuikLIFT enables decks to be raised slightly for traversing paths without the need to disengage the PTO. Also aides in striping.



ARTICULATION ABILITY

With three articulating decks the Snake has the ability to follow contours.



Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the decks.



LOW MAINTENANCE

SteadFast sealed spindles have eliminated the tedious task of regular greasing. Snake Series 2 now also features maintenance free pivot bushes.

FEATURES.

✓ 5 YEAR EXTENDED WARRANTY

Increase the standard three-year warranty up to a five-year extended warranty for total peace of mind. T&C's apply.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear.

✓ ELECTRIC UNLOCK Unlocks decks electronically from

the tractor seat.

✓ MULTI LIFT SYSTEM

Five different lift functions for mower decks. Now with Drive

✓ MUDGUARDS, LIGHTS, & CHAINS Add LED tail light clusters, safety chains, and transport wheel

mudguards for increased safety during road transportation. **✓** MULCH KIT

Baffle system for mulching branches

& leaves while mowing.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

✓ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.



TRIMAX PEGASUS S5

The Trimax Pegasus sets the benchmark in wide area mowing for parks, reserves, airports, racecourses, sports fields, turf farms, and more.

For over 20 years, the Trimax Pegasus has been leading the way in wide-area mowing. Introduced in 2001 as the world's first multi-deck roller mower, the Pegasus is renowned for its robustness and versatility. Its fast spindle speeds and deep mowing decks deliver the highest quality cut and finish every time, and articulating decks provide a consistent cut over light to moderate contours.

The Pegasus S5 builds on the incredible strength, durability, versatility, and efficiency of the previous series to increase machine life and decrease downtime in full-time commercial applications.

493	610	722
4.94m (16' 2")	6.09m (19' 11")	7.23m (23' 9")
5.1m (16' 9")	6.25m (20' 6")	7.39m (24' 3")
4.65m (15' 3")	4.65m (15' 3")	4.65m (15' 3")
2.53m (8' 3¾")	2.53m (8' 3¾")	2.53m (8' 3¾")
2.62m (8' 7")	3.2m (10' 6")	3.8m (12' 6")
10 - 110mm (¾" - 4¼")	10 - 110mm (¾" - 4½")	10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ")
9	11	13
2200kg (4895lbs)	2440kg (5380lbs)	2660kg (5865lbs)
50hp	55hp	60hp
	4.94m (16' 2") 5.1m (16' 9") 4.65m (15' 3") 2.53m (8' 3¾") 2.62m (8' 7") 10 - 110mm (¾" - 4¼") 9 2200kg (4895lbs)	4.94m (16' 2") 6.09m (19' 11") 5.1m (16' 9") 6.25m (20' 6") 4.65m (15' 3") 4.65m (15' 3") 2.53m (8' 3¾") 2.53m (8' 3¾") 2.62m (8' 7") 3.2m (10' 6") 10 - 110mm 10 - 110mm (¾" - 4¼") (¾" - 4½") 9 11 2200kg (4895lbs) 2440kg (5380lbs)

^{*}Minimum PTO output is a quide only. Requirement varies with the type of work and the terrain

APPLICATIONS.

- ✓ Turf / Sod Farm ✓ Parks & Reserves
 ✓ Racecourses, Polo, & Sports Turf
- Aviation Large Estates

WHAT'S NEW ON PEGASUS S5

The Pegasus chassis and outrigger arms have been completely redesigned to increase strength without adding unnecessary weight. Larger wheels decrease ground pressure and support a wider range of tyre options. Maintenance-free features have been introduced.



PRODUCT FEATURES.



ROBUST CHASSIS

10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



IMPACT PROTECTION

Outrigger arms and side channel leading edges have been redesigned for increased impact protection.



SUSPENSION

The new Pegasus S5 Flexiride Torque Suspension System is designed for increased strength and smoother travel at highway



LOW MAINTENANCE

Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



QUIKLIFT

Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.



HEIGHT ADJUSTMENT

Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



TITAN ROLLER BEARING SYSTEM

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



SAFETY COMPLIANT

Complies with international safety standards and can be used with confidence on the roads and in public spaces.



STAND ON BELT COVERS

Provides safe and easy access to the chassis.



✓ 5 YEAR EXTENDED WARRANTY

Increase the standard three-year warranty up to a five-year extended warranty for total peace of mind. T&C's apply.

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ ELECTRIC BRAKE KIT

& BREAKAWAY

Reduces braking force required by the

✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

✓ MULTI-LIFT SYSTEM

Five different lift functions for mower decks. Now with Drive Protect.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ QUATTRO BLADE SYSTEM

Four blades (flat, upturned or mixed) per spindle for a finer cut.

▼ ROAD KIT

Adds lights, signage, and beacons to the mower

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ SPARE ROAD WHEEL & MOUNT

Mounts a spare wheel to the rear mowing deck.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

✓ TOOLBOX & MOUNT

Mounts a toolbox to the mower chassis. **✓ TURF TYRES** Distributes mower weight for less

ground disturbance.


✓ TURF MUDGUARDS

Available for both road tyres and turf



USTRY LEADING

YEAR

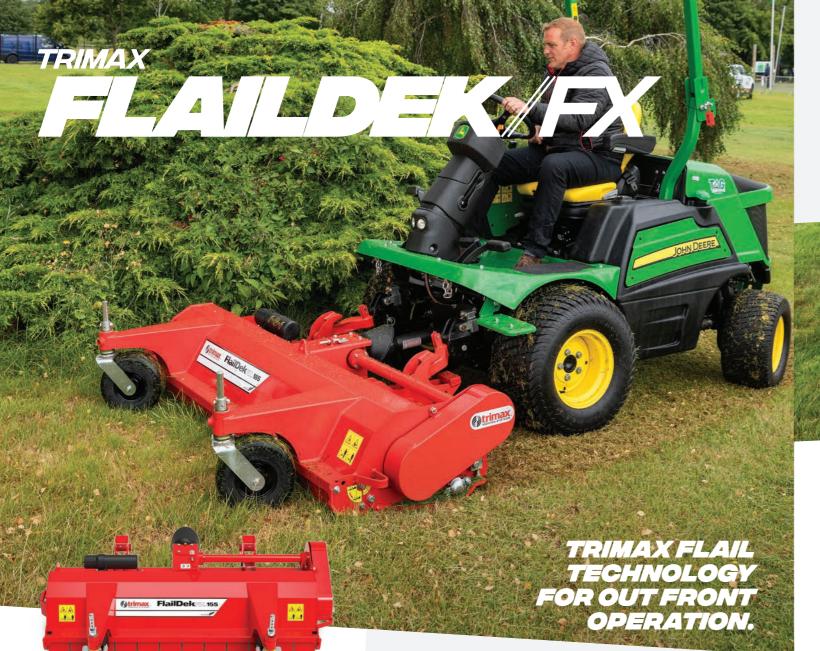

TRIMAX FLAILDEK/FX

The Trimax FlailDek FX offers a highperformance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, schools and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 25mm in diameter, mow high grass and using the unique converter flap is suitable for sports fields and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

		*8 💮	100
SPECIFICATIONS	135	155	185
Cutting Width	1.36m (4' 6")	1.52m (5')	1.83m (6')
Overall Width	1.56m (5' 1½")	1.72m (5' 8")	2.05m (6' 8½")
Overall Length	1.1m (3" 7)	1.1m (3'7")	1.1m (3' 7")
Overall Height	0.37m (1' 2½")	0.37m (1' 2½")	0.37m (1' 2½")
Cut Height Range	20 - 100mm (¾" - 4")	20 - 100mm (¾" - 4")	20 - 100mm (¾" - 4")
Approx. Weight	210kg (460lbs)	225kg (495lbs)	250kg (550lbs)
Total Belts	2	2	2
No. of Flails	28	32	40
Hydraulic Drive	N/A	Optional	N/A
Min PTO Output	N/A	N/A	N/A
*Minimum DTO outnut	t is a auide anly Deauireme	ant waring with the tune of w	

Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The FlailDek processes grass so much better than a Slasher, it mulches and doesn't leave any windrows and it goes into places a slasher can't. It's tough enough to mulch heavy vegetation such as blackberries and saplings.

- BRANDON PURTELL | Wodonga Golf Club, Wodonga QLD

KEY APPLICATIONS.

✓ Horticulture ✓ Municipalities ✓ Golf course roughs ✓ Racecourses ✓ Sports Fields

✓ Schools
✓ Aviation

WHAT'S NEW ON FLAILDEK FX

Strength and durability are increased from the original FlailDek design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter has also been added.



PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. Open converter for increased productivity in long grass environments.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tyres are impossible to puncture.



POWER SAVING FLAILS

Strong forged steel flail with
an aerodynamic profile reduces
hp requirements yet generates
sufficient draught to lift grass for a
clean cut.



WEAR RESISTANT SKIDS

Wear resistant trailing skids made from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.



NEW IMPROVED ROTOR

*OPTIONAL

✓ SERVICE KIT

FEATURES.

for a quick routine service.

Full set of blades, bolts and belts

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.



TRIMAX EZEEMOWEX

The EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension, Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 25mm in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for contractors, councils, roadsides, estates, and orchard applications.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership yet deliver maximum reliability.







SPECIFICATIONS	135	155	185
Cutting Width	1.36m (4' 6")	1.52m (5')	1.83m (6')
Overall Width	1.56m (5'1½")	1.72m (5' 8")	2.05m (6' 8½")
Overall Length	0.58m (1' 11")	0.58m (1' 11")	0.58m (1' 11")
Overall Height	0.37m (1' 2½")	0.37m (1' 2½")	0.37m (1' 2½")
Cut Height Range	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")
Approx. Weight	180kg (396lbs)	200kg (440lbs)	225kg (495lbs)
Total Belts	2	2	2
No. of Flails	28	32	40
Min PTO Output	17hp	20hp	24hp
*A4:: DTO	in a sociala socio. Descripsoco		

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same gearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model..no two ways about it!

STEVE DE BRUIN | Grass Cutting Services, Tauranga NZ

KEY APPLICATIONS.

✓ Estates & Lifestyle Blocks ✓ Orchards & Vineyards ✓ Horticulture ✓ Municipalities ✓ Horse Agistment

WHAT'S NEW ON EZEEMOW/FX

Strength and durability are increased from the original Ezeemow design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter, an improved belt tensioning system, and easy height adjustment on the full width roller have also been added.

SAFE CLIPPING DISPERSION

behind the mower.

NEW IMPROVED ROTOR

use in the toughest mowing

environments.

Dynamically balanced and designed

for durability to withstand everyday

Safety is paramount when mowing

in public areas. This is why Trimax

has designed the Ezeemow FX to



PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments, lift converter for increased productivity.



REAR ROLLER


Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



EZEEZMOW

OFFSET

DIAGRAM ONLY AVAILABLE IN FIXED CENTRE MOUNT OR OFFSET POSITIONS



requirements. . 879mm Centre Mo

*OPTIONAL FEATURES.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

POWER SAVING FLAILS


Gämma

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient expel debris in a downward direction draught to lift grass for a clean cut.



*RIGHT-HAND OFFSET

Comes standard with a centre mount but is available in a right-hand offset to suit your specific mowing



TALK TO US TODAY ABOUT THE CAPABILITIES OF EZEEMOW FX IN YOUR ENVIRONMENT.





TRIMAX FORCE

A brand-new heavy-duty flail mower which has been designed to tackle the toughest commercial applications.

This multitool mower and mulcher is our strongest and most adaptable flail mower yet! With a wide range of options available, it can be configured to suit individual mowing and mulching needs.





				•	
SPECS	115	145	175	205	235
Cutting Width	1.15m	1.44m	1.73m	2.02m	2.3m
	(3' 9 ½")	(4' 8 ¾'')	(5' 8 ½")	(6' 7 ¾")	(7' 6 ¾")
Overall Width	1.45m	1.73m	2.02m	2.31m	2.59m
	(4' 8 ⁷ / ₈ ")	(5' 8 ¼")	(6' 7 ¾")	(7' 7")	(8' 5 ½")
Overall Length	1.15m	1.15m	1.15m	1.15m	1.15m
	(3' 9 ½")	(3' 9 ½")	(3' 9 ½")	(3' 9 ½")	(3' 9 ½")
Overall Height	0.5m	0.5m	0.5m	0.5m	0.5m
	(1' 7 ¾")	(1' 7 ¾'')	(1' 7 ¾")	(1' 7 ¾")	(1' 7 ¾")
Cut Height	0 - 60mm	0 - 60mm	0 - 60mm	0 - 60mm	0 - 60mm
Range	(0 - 2 ¾")	(0 - 2 ¾")	(0 - 2 ¾")	(0 - 2 ¾")	(0 - 2 ³ / ₈ ")
Approx. Weight	590kg	650kg	755kg	815kg	870kg
	(1300lbs)	(1435lbs)	(1665lbs)	(1795lbs)	(1920lbs)
Flails	16	20	24	28	32
Min PTO Output	30hp	35hp	40hp	45hp	50hp
*Adimination DTO Outro	41	. n			446.4

*Minimum PTO Output is a guide only. Requirement varies with the type of work and the terrain.

KEY APPLICATIONS.

✓ Orchards ✓ Vineyards ✓ Roadsides ✓ Parks & Reserves ✓ Turf Farms ✓ Estates & Lifestyle Blocks

WHAT'S DIFFERENT FROM THE WARLORD.

Strength and durability have been increased, including 50% thicker endplates and a newly designed rotor bearing assembly with over 35% higher load capacity than Trimax's previous flail mowers. Zero-maintenance features and a wider array of options have also been introduced.

PRODUCT FEATURES.



MOW AND MULCH WITH **ONE MACHINE**

Mow grass to a fine finish and mulch prunings up to 90mm in diameter with one machine.



DISCHARGE CONTROL

The coarseness of mulch can be controlled by adjusting the height of the rear flap.



AUTO BELT TENSIONING

The belt system is equipped with automatic tensioners to optimize drive to the rotor without requiring manual adjustments.



REPLACEABLE INTERNAL LINER

A 6mm replaceable internal liner reduces noise and increases durability in the mower's highimpact zones.



OFFSET CAPABILITIES

The Force can come with a leftor right-hand offset with an additional 500mm of hydraulic side shift. Available on the 175, 205, and 235 models.



SMOOTH EXTERNAL PROFILE

New internal rotor bearings create a smooth external profile and provide a closer cut around obstacles.



and maintenance-free features make regular service quicker and easier than ever.





MAINTENANCE-FREE **ROLLER BEARINGS**

New highly-rated sealed roller



mower trailing arms prolong mower life in demanding terrain and are easily removed or replaced.

*OPTIONAL FEATURES.

→ HEAVY DUTY LINER

Increases durability in the mower's high impact zone.

→ HEAVY DUTY ROLLER

Increases roller wall thickness from 5mm to 11mm.

✓ HYDRAULIC SIDE SHIFT

Position directly behind the tractor or quickly offset by up to 500mm (19") for easy transport and increased maneuverability. (Available only for 175, 205, and 235.)

✓ MULCHING COUNTERBLADES

Produces an ultra-fine mulch.

✓ PRUNING RAKES

Collects prunings into the cutting chamber.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and









Extremely versatile, the Trimax WARLORD S3 is bound to dominate any environment you put it in – handling long and short grass, prunings up to 75mm in diameter, turf ribbons and offcuts with ease.

Tame rough patches full of scrub and branches in one pass and leave behind a field of evenly distributed mulch and clippings. Control the coarseness of discharge with Warlord's adjustable rear flap while safely dispersing clippings. The Trimax Warlord is tough and durable, requiring minimal maintenance and simplifying repairs to keep your machine running for years. Spend less time and money keeping your mower operating at 100%.

The Trimax Warlord S3 is a medium duty mower/mulcher suitable for a wide range of applications including sod and turf farming, horticulture, passive turf management, contracting/ hire, and land reclamation.







175	205	235
174~ (F' O")		
1.74m (5' 9")	2.04m (6' 8")	2.34m (7' 8")
2.04m (6' 8")	2.34m (7' 8")	2.66m (8' 8")
1.05m (3' 5")	1.05m (3' 5")	1.05m (3' 5")
0.55m (1'10")	0.55m (1' 10")	0.55m (1' 10")
0 - 70mm (0 - 2¾")	0 - 70mm (0 - 2¾")	0 - 70mm (0 - 2¾")
690kg (1520lbs)	750kg (1650lbs)	810kg (1780lbs)
24	28	32
40hp	44hp	49hp
	1.05m (3' 5") 0.55m (1' 10") 0 - 70mm (0 - 2¾") 690kg (1520lbs) 24 40hp	1.05m (3' 5") 1.05m (3' 5") 0.55m (1' 10") 0.55m (1' 10") 1.05m (0 - 2¾") 0 - 70mm (0 - 2¾") 1.05m (1' 10") 2.55m (1' 10") 1.05m (3' 5") 2.55m (1' 10") 1.05m (1' 10") 2.5

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



stands head and shoulders above the rest.

- ALAN CHAPEL | AML Turf, Wodonga QLD

KEY APPLICATIONS.

- ✓ Orchards & Vineyards
 ✓ Horticulture Sports Fields
 - ✓ Schools
- Municipalities
- ✓ Turf Farms Racecourses
- Aviation

WHAT'S NEW ON WARLORD S3

The hydraulic side shift and discharge control capabilities are new from the previous Warlord series, further increasing the versatility of the machine.



PRODUCT FEATURES.




HYDRAULIC SIDE SHIFT

The Warlord can be quickly offset to the left or right by up to 500mm. Perfect for transport and manoeuvring around obstacles whilst mowing.



REPLACEABLE INTERNAL LINER

A bolt-in 6mm replaceable internal liner increases the life of the body, minimises damage and reduces noise.



Fine mulch is produced with the flap

public spaces. Lift flap open for easy

in the lowest position. Controlling

discharge assists with safety in

HEAVY DUTY ROLLER

DISCHARGE CONTROL

A robust roller with 8.5mm-thick walls to handle tough applications.



PRUNING GUIDE

Helps direct prunings in and under the mower. Also helps keep debris away from the hydraulic system.



✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.



REPLACEABLE SKIDS


Skids on Warlord trailing arms prolong Warlord comes standard with left mower life in demanding terrain and hand offset for increased visibility. can be replaced when required.





*LEFT HAND OFFSET

WARLORD **OFFSET DIAGRAM**

HYDRAULIC SIDE SHIFT / LEFT OFFSETS AVAIL ABLE







TALK TO US TODAY ABOUT THE CAPABILITIES OF WARLORD SERIES 3 IN YOUR ENVIRONMENT.

We do a lot of roadside work for councils, shires and local government. We use the Warlord where it's too tough for other machines, from my past experience it

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX WARLORD SERIES 3 ONLINE HERE:



5 YEAR EXTENDED WARRANTY

ncrease the standard threeear warranty up to a five-vear extended warranty for total peace of mind. T&C's apply.



✓ ELECTRIC UNLOCK

Replaces the standard in-cab transport lock release rope with an electric actuator. This is operated by a push button



MUDGUARDS, WITH LIGHTS & CHAINS

Roadside operations or road travel between operation sites.



ROTARY MOWERS.

✓ NEXABLADES

Scientifically designed for highend turf giving a superior cut &



▼ ROLLER SCRAPERS Keeping rollers clean from wet

grass clippings or worm cast.



✓ STORAGEBOX

Keeping tools and parts on hand for quick adjustments.





ANTI-BOUNCE/ ANTI-WEAR SKIDS

FRONT MOUNT

Increased visibility during

with front PTO drive only.

Baffle system for mulching

branches & leaves while mowing.

✓ MULCHKIT

SERVICE KIT

routine service.

✓ TOOLBAG

Keeping parts on hand for quick


Easy height adjustment in the

ncreasing mowing speed while maintaining excellent presentation; protecting side channels in high-wear applications.



ELECTRIC BRAKES

Roadside operations or road travel between operation sites.



LIGHTING KIT & STORAGE BRACKET

Mounting kit with storage

bracket, reflector triangle &

MULTI-LIFT SYSTEM WITH DRIVE PROTECT

Complete mowing deck control for areas with varied clearance





✓ ROADKIT

Adds lights, signage, and beacons to the mower.



SPARE WHEEL & MOUNT

Mounts a spare wheel to the rear mowing deck.



✓ TOOLBOX & MOUNT

Mounts a toolbox to the mower chassis



TURF TYRES

Decreasing mower impact on turf through tread pattern and width: ideal when mower stavs at a single site.

HEAVY DUTY LINER

Increase the life of your

replaceable internal liner by



HEAVY DUTY ROLLER

Upgrade from the 5mm thick roller to a roller with 11mm wall thickness. Suitable for more demanding applications.





MULCHING **COUNTERBLADES**

An internal liner with builtin blades for extra material processing. Can produce ultrafine mulch.



SAFEY DISPERSION **GUARD**

The Safety Dispersion Guard ensures that debris exits the cutting chamber safely.



FRONT MOUNT

Increased visibility during operation. Suitable for tractors with front PTO drive only.

Position directly behind the


tractor or quickly offset for

easy transport and increased

✓ HYDRAULIC SIDE SHIFT



naneuverability.





Keeping parts on hand for quick routine service.



✓ STORAGE BOX


PRUNING RAKES

Collects prunings into the

cutting chamber for more

efficient mulching.

Keeping tools and parts on hand for quick adjustments.



Trimax Mowing Systems UK Facility - Northampton, UK

FOR EUROPEAN AND UK CUSTOMERS AREBUILT IN THE UK.

As the leading supplier of mowers to local authorities and contractors, many customers now have a fleet of multiple Trimax mowers, confident in a brand that they know will not let them down.

Our Northampton facility, established in 2015, is equipped to build over 75% of the market-leading Trimax range in the UK.

We are proud to build on our local sourcing and manufacturing efforts to strengthen our ability to supply quickly and meet customer expectations.



Trimax Global Headquaters - Tauranga, New Zealand

Mtrimax

FLAIL MOWERS.



ROTARY MOWERS.





AILDEK /FX



PROCUT/S5





EZEEMOW /FX

WANT TO KNOW MORE? FIND US ONLINE.

THE TRIMAX WEBSITE.

The Trimax website contains more information, photos, and videos of our products and features.

TRIMAXMOWERS.CO.UK



OR USE THIS OR CODE

THE TRIMAX RESOURCE CENTRE.

Easily accessed from the main website, the **Trimax Resource** Centre provides everything you need to easily service and maintain your Trimax mower. Best of all. it's completely free.



THE TRIMAX **CUSTOMER CENTRE.**

- Watch step-by-step service and setup videos.
- Download maintenance checklists.
- Access the operator manual and parts manual for your mower.
- Read instructions for installing Trimax Genuine Spare Parts.



THE TRIMAX PARTS SHOP.

- Browse the catalogue of Trimax Genuine Parts and Service Kits.
- Quickly find common parts.
- Now with improved search functionality find exactly the part you need.



WHEN DOWNTIME IS NOT AN OPTION, SAVE MONEY ON EQUIPMENT THAT LASTS. YOU CAN COUNT ON TRIMAX.

2 LOW TOTAL **ILL** COST OF OWNERSHIP.

- Long commercial life, with mowers 35 years old and counting still in the field.
- > Reduced time, labour, and fuel requirements for each job.
- Affordable aftermarket parts guaranteed to meet Trimax quality standards.

RELIABLE SUPPORT.

- Next-day parts dispatch from our local warehouse in England.
- > Knowledgeable local service staff and easy-toaccess online resources.
- Industry-leading 3-year warranty which includes spindles and gearboxes.

PRODUCTIVITY-BOOSTING EFFICIENCY.

- > Less time in the shop with minimised and simplified service requirements.
- Designed for/tested in the harshest environments for maximum uptime in normal commercial operations.
- > A wide range of available options to customise for your specific needs.

TRIMAX BUILDS MOWERS THAT LAST, AND WE BACK THAT UP BY OFFERING THE LONGEST AND **MOST COMPREHENSIVE** WARRANTY IN THE INDUSTRY.

All Trimax mowers come with a standard 12-month warranty with the opportunity to extend another 24 months by registering new machines online

- V COVERS SPINDLES
- ∨ COVERS GEARBOXES
- ABSOLUTELY FREE



TRIMAX MOWING SYSTEMS

40 Lower Farm Road, Moulton Park, Northampton NN3 6XF, UK **P** +44 0 1933 652 235 / **E** info@trimaxmowers.co.uk

FOR MOWER ENQUIRIES

P +44 0 1933 652 235 / **E** info@trimaxmowers.co.uk

FOR PARTS ENQUIRIES

P +44 0 1933 652 246 / **E** parts@trimaxmowers.co.uk





